



CHINA WALL

TRADING SINCE 1996


**BUSINESS
CATALOGUE**

About Us



Since 1996, China Wall Trading L.L.C. has been providing the MENA region with high-quality HVAC services. We are experts in refrigeration and air-conditioning systems, and we work hard to ensure all our customers receive the finest quality products and customer service. Our goal is simple—keep your environment comfortable, all year long. So, whether you need maintenance, repair, or replacement, China Wall Trading is here to offer reliable, efficient solutions. Contact us today to learn more.....

OUR SERVICES

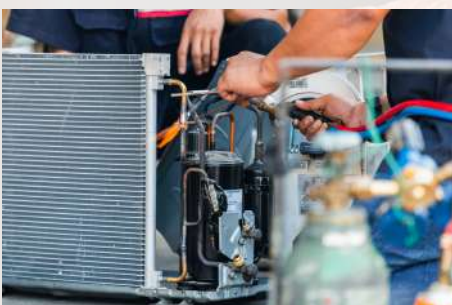

VALUE[®]

VALUE Creates Value

Easy·Accurate·Efficient

VET-19Li

Power Flaring Tool

VTE Series

Power Tube Expander

VTB-22L

Power Tube Bender



VALUE[®] *Creates Value*

Distributed by China Wall Trading LLC.

VALUE[®]

VALUE Creates Value



VALUE[®] *Creates Value*

Distributed by China Wall Trading LLC.

VALUE[®]


VALUE Creates Value



VALUE[®] *Creates Value*

Distributed by China Wall Trading LLC.

S1/S2 Mini Condensate Pump

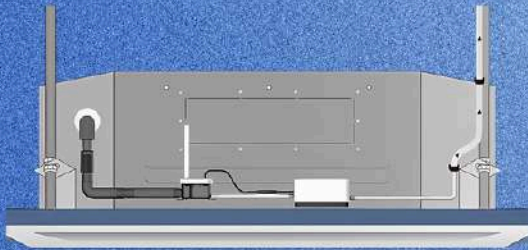

For the layout of the pump



M1/M2 Condensate Pump



For the layout of the pump





**The world's leading
refrigerant manufacturer,
Dongyue Group provides you
with the highest quality
refrigerants.**



STAY COOL & STAY COMFORTABLE

STAY WITH DY

Keep the coolness and comfort of your home and business with the best coolant services in the city. Let's keep the comfort of your home only with **DY Refrigerant** service.



Mascotop®



SUPERIOR CAPACITOR



CBB60 RUNNING CAPACITOR



GOLD LIMITED EDITION



5 IN 1 MULTI SMART COMBINATION



SPP6 & SPP5 HARD STARTING CAPACITOR



CBB65 RUNNING CAPACITOR



MULTI SIZE CBB61 CAPACITOR



Distributed by China Wall Trading L.L.C.

Mascotop®



world-class Quality
produced by
Mascotop




Distributed by China Wall Trading L.L.C.



Professional Refrigeration System Service Tool

MADE IN TAIWAN

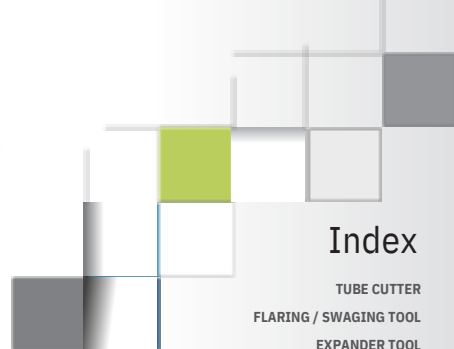

Index

- TUBE CUTTER
- FLARING / SWAGING TOOL
- EXPANDER TOOL
- TUBE BENDER
- TORQUE WRENCH
- TUBING TOOL
- REPLACEMENT GAUGE
- CHARGING HOSE
- SERVICE MANIFOLD
- QUICK COUPLERS
- SERVICE ACCESSORIES
- AIR CURTAIN
- INSTRUMENT
- BRASS FITTING
- OTHERS
- BRAZED PLATE HEAT EXCHANGER
- AC&R COMPONENT PARTS

Tube Cutter

Item No. 127R

Mini cutter
1/8" ~ 5/8" O.D. tubing
with rollers for easy
cutting



Item No. 274

Heavy duty cutter
1/8" ~ 1-1/8" O.D.
tubing Including
spare wheel



Item No. 206

Sliding ratchet cutter 3/8" ~
2-5/8" O.D. tubing
Including spare wheel



Item No. PTC-01

Capillary tube cutter
capacity : 1.0 mm ~ 3.0
mm O.D. tubing



PF-015T



368-180



DW-0885

Flaring . Swaging Tool

Item No. 810L

Light weight ratchet type flaring tool in inch sizes for easy operation if space is tight for tubes with an outside diameter of : 1/4", 5/16", 3/8", 1/2", 5/8" & 3/4" O.D. tubing including tube indicator
Made of aluminum alloy



Combination of New and Light Weight / No Scratch in Flaring

Item No. 808AL

Assembled eccentric cone type flaring tool (Item No. 808A)
Packed with reamer & tube cutter in blow case



Eccentric cone type flaring tool with automatic torque release in metric sizes. made of forged high quality carbon steel for tubes with an outside diameter of : 6, 8, 10, 12, 14, 16 & 19mm O.D. tubing



808A

Expander Tool

Item No. 101HT-A

Hydraulic expander tool
Kit contents : heads for 3/8", 1/2", 5/8", 3/4", 7/8", 1", 1-1/8" tubing O.D., & 208A reamer (plastic carrying case)



Tube Bender

Item No. 404L

7 in 1 multi bender kit
Cross-bow-type tube bender set for an easy operation and carry diameters : 1/4", 5/16", 3/8", 1/2", 5/8", 3/4" & 7/8" O.D.
supplied in a sturdy plastic case.



525



195



193-S



203





Torque Wrench

Item No. 633A

Interchangeable torque wrenches complete kit Torque : 10~75 Nm
Size of wrenches: 17, 22, 24, 26, 27 & 29 mm
Kit Contents :

Wrench Dimension Refrigerant
171/4" Conventional torque wrench + R410A
223/8" Conventional torque wrench + R410A
241/2" Conventional torque wrench
261/2" R410A
275/8" Conventional torque wrench
295/8" R410A

633A



Item No. 275L

For 45 flaring of 1/8", 3/16", 1/4", 5/16", 3/8", 7/16", 1/2", 5/8" and 3/4" O.D. soft copper, aluminum and brass tubing covert quickly to swaging tool with use of swaging adapters for 3/16", 1/4", 5/16", 3/8", 1/2", 5/8" and 3/4" O.D. tubing

275L



Item No. 278L

For 45 flaring of 1/8", 3/16", 1/4", 5/16", 3/8", 7/16", 1/2", 5/8", and 3/4" O.D. soft copper, aluminum and brass tubing covert quick to swaging tool with use of swaging adapters for 3/16", 1/4", 5/16", 3/8", 1/2", 5/8" and 3/4" O.D. tubing, also included one 274 cutter and one reversible ratchet wrench

278L



Service Manifold



Item No. 536G



Item No. 4WDD



Item No. PM-700-24

Digital manifold kit :
• with 360RYB hoses
• TP-03 K type temperature probes
• CTK-01 K type Clamp thermocouple
• packed by blow case

Quick Couplers



QC-H

QC-L

QC-16-H

QC-16-L

QC-12

Replacement Gauge



RG2440H-80



RG2440L-80

Charging Hose

336RYB

360RYB

372RYB

396RYB



Charging hoses (R134a) 1/2" acme x 1/2" acme (yellow), 1/2" acme x 14mm (blue & red)

360RYB- 410

372RYB- 410



Charging hoses (R410) 1/4" SAE x 5/16" SAE 45°

Charging Scale



Item No.

PCS -120B

Electronic programmable charging scale (resolution 5g) for all refrigerants. Programmable amount of refrigerant.

Lbs./oz. : Kilograms dual measurement unit.
Removable weight platform.
Weight capacity : 0 lbs 0.0 oz to 264 lbs., 0.0 oz / 0.000kg to 120 kg
Resolution : 5g / 0.2oz
Accuracy : ±0.5%

Operating temperature : 32°F to 113°F (0°C to 45°C)

*Solenoid = DC 6V (AA*4)

Leak Detector Item No. PM-382



Refrigerant leak detector
Audible beep and three color level LED display Equal sensitivity to CFCs, HCFCs and HFCs
15.5" (40cm) flexible stainless probe
High -low leak sensitivity
low battery indication
Working temp : -10 ~ 60°C





QD-PU01E
CONDENSATE PUMP
Maximum flow :24 L/h

QD-PU01F
CONDENSATE PUMP
LARGE DISCHARGE CAPACITY
Maximum flow :40 L/h



QD-PU02E
SPLIT TYPE PUMP
Maximum flow :24 L/h

QD-PU02F
SPLIT TYPE PUMP
LARGE DISCHARGE CAPACITY
Maximum flow :40 L/h



QD-PU03E
CONDENSATE PUMP
Maximum flow :200 L/h

QD-PU03F
CONDENSATE PUMP
LARGE DISCHARGE CAPACITY
Maximum flow :260 L/h



Wireless high-pressure car cleaner Household car washing machine

DIMENSIONS	25*9*21CM
POWER	100-120W
WORKING TIME	16Min-18Min
FLOW RATE	2.7L/h
RATED PRESSURE	10-15bar



QD-HVAC09

- Air Conditioner Thermostat**
- Set points and room temperature display simultaneously
 - 6.8 sq. inch backlight LCD
 - Compressor short cycling protection available



QD-HVAC10

Programmable Thermostat

- 5+2 programmable
- 6.8 sq. inch backlight LCD
- Battery power or 24V Hardwire



QD-HVAC21

- Touch screen thermostat**
- Full screen design integrated touch panel.
 - Silver metal coating process.
 - Power button 3D concave inside.
 - White backlight, automatic brightness adjustment.



QD-HV123CW

Smart color screen WiFi thermostat

- Colorful & Touching LCD screen
- Wireless control
- 7 days programmable





❖ KT-5999

Universal A/C Remote Control

- 6000 IN 1
- Codes inputting
- Timer on/off
- Clock function

❖ KT-6018

Universal A/C Remote Control

- 6000 in 1
- Codes inputting
- Timer on/off

❖ KT-9018E

Universal A/C Remote Control

- 4000 in 1
- Codes inputting
- Intelligent cooling heating function

❖ KT-109II

Universal A/C Remote Control

- Fast cool
- Comfortable keys
- Hybrid coding patent and no setting

6000-12000 BTU



❖ QD85

Universal DC inverter control system for split air conditioner

- Refrigeration&heat effect better
- Drive strong DC compressor
- Drive outdoor DC fan motor
- Drive indoor DC fan motor

18000-24000 BTU



❖ QD82U+

Universal DC inverter control system for split air conditioner

- Drive strong DC compressor
- Drive outdoor DC fan motor
- Drive indoor DC fan motor
- Drive electronic expansion valve



❖ QD68AI

AI & WIFI UNIVERSAL A/C CONTROL SYSTEM

- Off-line voice control
- Quick voice answer
- Wi-Fi router connection
- Smart life APP to remote control



❖ QD-U02B+(M)

Universal Air conditioner control system

- 3 fan speed
- Luxury receiver
- Transformer plug



❖ QD55DC

Universal Air conditioner control system

- Special use for 310V DC fan
- Strong start capacitor for fan motor
- Auto restart function



❖ QD-U03C+

Universal Air conditioner control system


- Auto restart
- Double sensors
- Outdoor fan controlled independently



❖ QD-U08C

Universal Air conditioner control system

- Auto restart
- Digital temperature display
- Outdoor fan controlled independently



❖ QD-U12A

Universal Air conditioner control system

- Auto restart function
- Large LCD display panel
- High production technique

MODEL:STC-100A



- Manually switch between heating and cooling;
- Calibration temperature;
- Control the temperature by adjusting the temperature set value and difference;
- The refrigeration and heating start delay protection;
- Sensor error alarm;
- Limit the temperature setting range;



power supply	220VAC ±10%, 50/60Hz
Temperature measurement range	-40°C~99°C
temperature resolution	1°C
Relay contact capacity	10A/220VAC
Overall size	L77xW34.5xD62(mm)

- The controller is suitable for temperature control of medium and low temperature cold storage and heating equipment.
- With temperature measurement, display and control functions; temperature correction; temperature over-temperature and sensor failure alarm;
- One-key recovery of factory settings; a set of parameters can be preset and one-key recovery;
- Using touch keys, with key lock function.

MODEL:EK-3010



power supply	220VAC ±10%, 50/60Hz
Temperature measurement range	-40°C~99°C
Temperature control range	-40°C~85°C
Relay contact capacity	10A/220VAC
Overall size	L77xW34.5xD82(mm)



MODEL:TPM-10



- LCD display, one side to measure temperature, fashionable appearance, with small size;
- Suitable for aquarium and also suitable for lab, planting green house (black and white selectable)

power supply	two button battery (AG13.5V)
Temperature measurement range	-50°C~70°C
Accuracy	±1°C
Operating humidity	5%~80%
Display size	36*16.5mm





MODEL:EK-3020



- This controller is suitable for temperature control of medium and low temperature cold storage;
- With temperature measurement, display and control functions. Calibration, forced defrost, over temperature. Alarm and sensor failure alarm, one key to restore the factory default value,
- parameter preset, one key to restore;
- Adopt touch key design, with key lock function;
- Single-channel sensor input: cabinet temperature sensor (Pb1). Dual control outputs: cooling and defrosting.



power supply	220VAC ±10%, 50/60Hz
Temperature measurement range	-40°C~99°C
Temperature control range	-40°C~85°C
Relay contact capacity	10A/220VAC
Overall size	L77xW34.5xD82(mm)

MODEL:TH-6000Pro



MODEL:STC-9200



- Refrigeration, defrost and fan control modes;
- The user menu and the administrator menu can be set separately, which is convenient for users to operate, and leaves enough space for the adjustment of senior management;
- Differential control mode, the temperature display resolution is 0.1;
- Multiple protection and alarm modes are optional;
- CORYKEY function (optional).



power supply	220VAC ±10%, 50/60Hz
Temperature measurement range	-50°C~50°C
Accuracy	±1°C
Relay contact capacity	10A/220VAC
Overall size	L77xW34.5xD82(mm)





100% COPPER WIRE
AXIAL FAN MOTOR



92*92*25MM



120*120*25MM



120*120*38MM



150*150*50MM





100% COPPER WIRE
AXIAL FAN MOTOR



EC Q 8W



200*200*60MM



EC Q 5W



172*150*50MM





ASPELLA®



More products will be launched soon

Distributed by China Wall Trading L.L.C.



ASPELLA®

**Superior Quality
AC Fan Motor
100% Copper**



*Any models can be created by customer's own request
More models available in stock*

Distributed by China Wall Trading L.L.C.



SIBERIA



2024 R134a/R600a/R290/R404A ●
Specialists in Household and Commercial Refrigeration Appliances


SIBERIA COMPRESSOR

Range	Compressor	Compressor Description		
		Specification	Cooling Capacity	Refrigerant
L		LBP Very Compact size Very low noise & vibration High Reliability	35-100W	R600a, R134a
V		L/M/HBP Very Compact size Very low noise & vibration High Reliability	50-480W	R600a, R134a, R290
S		L/M/HBP Very Compact size Very low noise & vibration High Reliability	52-830W	R600a, R134a, R290
AT		L/M/HBP Very Compact size Very low noise & vibration High Reliability	88-950W	R600a, R134a, R290
F		LBP Compact size Low noise & vibration High reliability	100-455W	R600a, R134a, R290
B		L/M/HBP Stable performance High reliability	400-2500W	R134a, R290, R404A






SIBERIA

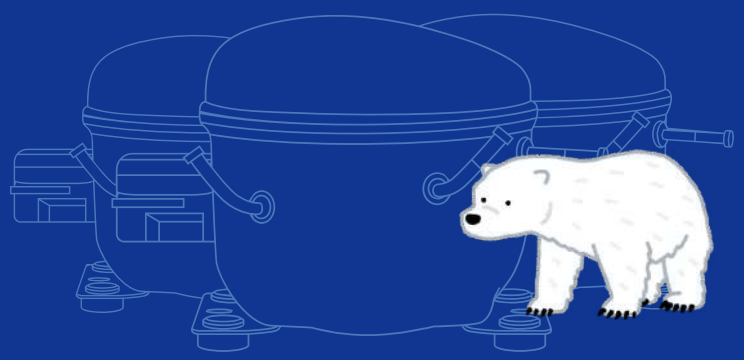


SIBERIA Compressor Models | SIBERIA压缩机型号定义 Identification Designation

© Compressor designation (for F, S, AT, V, L, B Series)

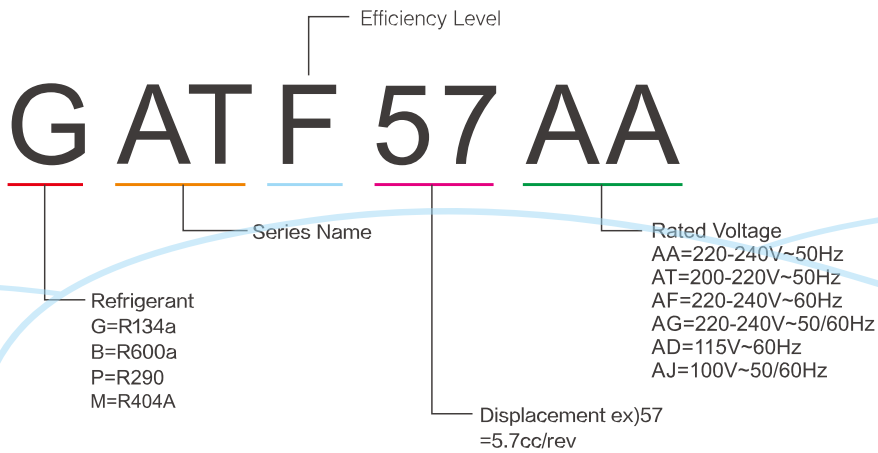

Identification Label | 铭牌设计

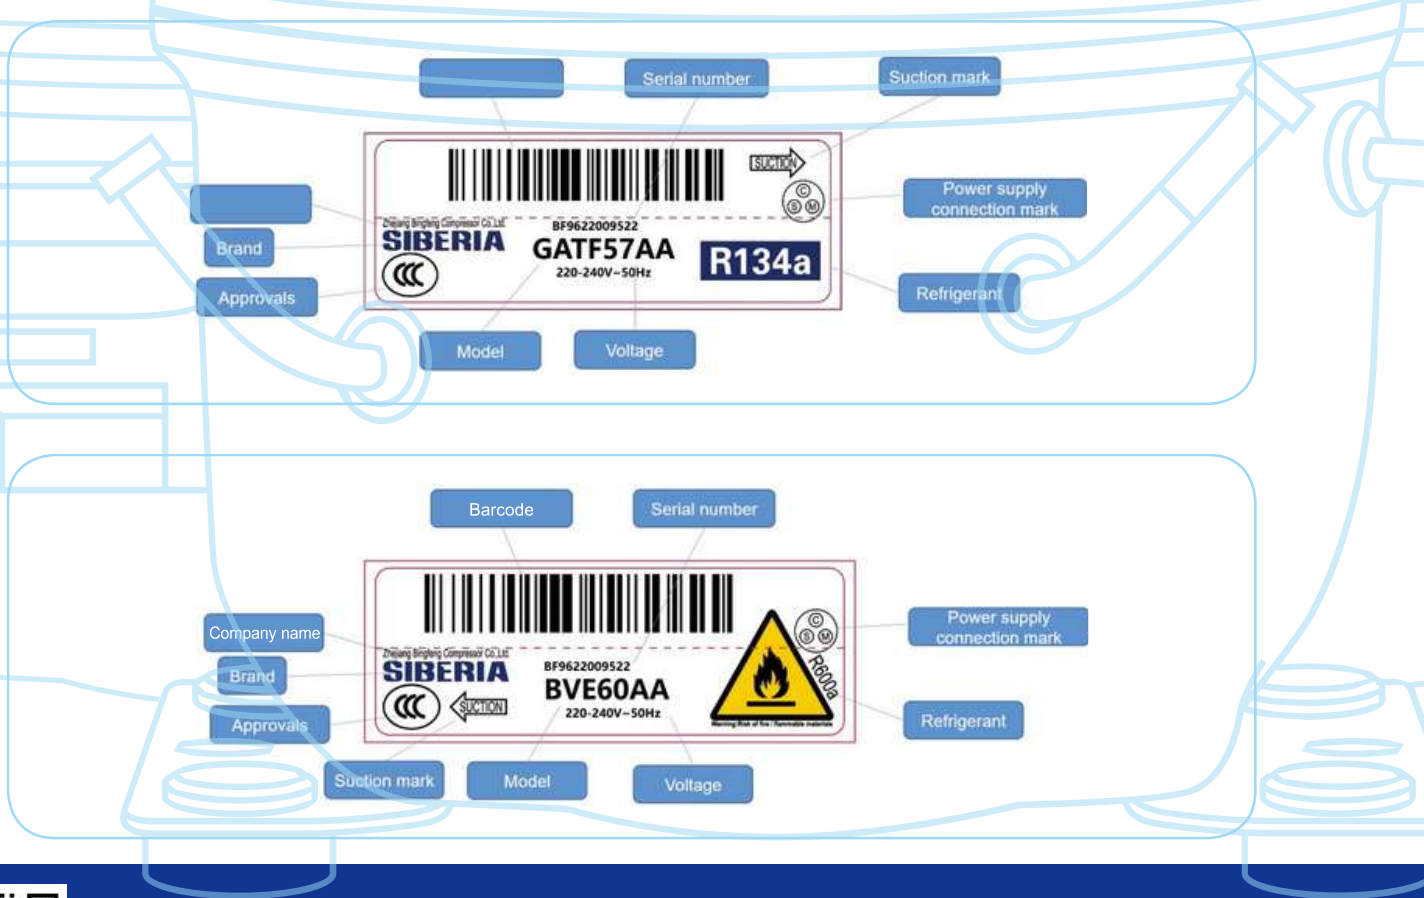



ST ALBANS

SUPER DYE UV LEAK DETECTOR PAG(R134a)

1/4 oz. Per Vehicle - Treats up
to 32 Vehicles Safe,
efficient, and fast leak detection



8 FL. OZ. (237ML)

SUPER DYE UV LEAK DETECTOR PAG(R-1234yf)



8 FL. OZ. (237ML)

1/4 oz. Per Vehicle - Treats up
to 32 Vehicles Safe,
efficient, and fast leak detection

NEW

Refrigeration Compressor Lubricant 3GS/4GS/5GS

Premium HVACR/MVAC lubricant
Use with air conditioner

OEM Approved

Product Use:

Recommend by most major equipment manufacturers,
Highly stable, essentially wax free, providing excellent
low temperature properties and assuring long
trouble-free life. Can be used in any compressor
installa- tion, and are mixable with (H)CFC refrigerants
and natural refrigerants.
Can be applied in commercial as well as in residential
refrigeration and air conditioning systems.

Caution:

Avoid skin and eye contact, especially with
used oil. Wash skin thoroughly after handling.
Launder contaminat ed clothes before reuse.
Keep out of reach of children.




3GS 4GS 5GS (1L)

3GS 4GS 5GS (4L)



Refrigeration Compressor Lubricant POE32/POE68

ERT series are highend automotive air conditioning compressor luating oils formulated from synthetic ester based oils and additives.

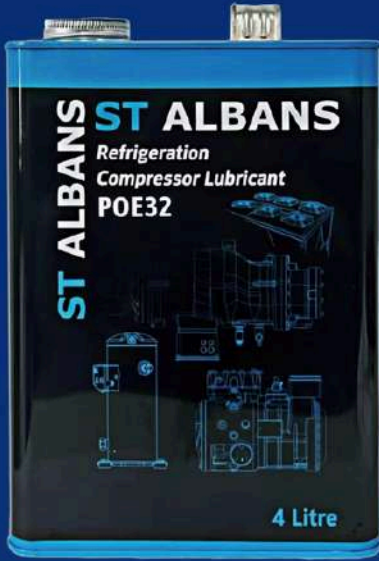

POE32 POE68 (4L) POE32 POE68 (1L)

Product performance:

- ERT series has good compatibility with HFC (such as R134aR404A,R407C, R410A,R507A,R23,R508A,R508B)
- Reliable lubrication
- Excellent thermal stability
- Chemical stability
- Electrical insulation and material compatibility

Item	Experimental Method	68	32
Kinematic viscosity(40°C), mm ² /s	ASTM D445	69	32
Kinematic viscosity(100°C), mm ² /s	ASTM D445	8.3	5.3
Flash point(open cup)°C	ASTM D92	>200	>200
Specific gravity (20°C),g/m ³	ASTM 4052	>0.956	>0.956
Pour point°C	ASTM D97	<-40	<-40
Colour (APHA)	ASTM D1500	<0.5	<0.5
moisture content (PPM)	ASTM D6304	<300	<300
Total acid number (mgKOH/g)	ASTM D974	<0.1	<0.1

VACUUM PUMP OIL VPO-68

Functional characteristics:

- Synthetic Formula Resist Oxidation
- Improves Vacuum Pump Performance
- Extends Vacuum Pump Life
- Compatible With All Vacuum Pump Brands

Warning:

Can cause an allergic skin reaction.
Avid all contact with the eyes.



VPO-68 500ML VPO-68 1G VPO-68 1L

VACUUM PUMP OIL VPO-100

Precautionary statements:

Wear protective gloves, protective clothing, eye protection and faceprotection when handling oils.
If on skin: wash with plenty of water.
If skin irritation or rash occurs: Get medical advice / attention.
Wash contaminated clothing before reuse.
Dispose of contents andthe container in an appropriate treatment and disposal facility in accord ance with applicable laws and regulations.Do not dispose of oil into drainage or into sources of drinking water.



VPO-100 500ML VPO-100 1G VPO-100 1L



ST ALBANS



ST ALBANS Super Dye U/V Detector Kit PAG (R134a) & PAG (R1234yf)



- 1PC 30ml PAG(R134a) U/V Dye Syringe
- 1PC 30ml PAG(R-1234yf) U/V Dye Syringe
- 1PC UV Goggles
- 1PC Luer Adapter
- 1PC 1/4 SEA HVAC&R Adapter for R22 -R134a-R404A-R507C, suitable for CFC,HCFC,HFC(except R410A) (Black O-ring)
- 1PC 5/16 SAE HVAC&R Adapter for R410A(Green O-ring)
- 1PC 1/4 Lock Adapter Connect with Quick Coupler
- 1PC Refrigeration Oil Installation Hose
- 1PC UV Lamp,wavelength 395nm,1.5V AAA Battery is not included;
- 1PC Push Rod
- 1PC Plastic Box

ST ALBANS Leak Sealer Kit for A/C & R System

1 PC 30ML Syringe for system up to 4 tons or 500ml of compressor lubricant

- 1PC 30ml Leak Sealer Syringe
- 1PC Luer Adapter
- 1PC 1/4 SEA Adapter for R22 -R134a-R404A-R507C, suitable for CFC,HCFC,HFC(except R410A) (Black O-ring)
- 1PC 5/16 SAE Adapter for R410A(Green O-ring)
- 1PC 1/4 Lock Adapter Connect with Quick Coupler
- 1PC Refrigeration Oil Installation Hose
- 1PC Push Rod
- 1PC Plastic Box

Leak stop that permanently repairs leaks up to 0.3 mm on rubber and metal components of air conditioning and refrigeration systems, including those in vehicles.Highly safe formula: polymer-free, does not react with moisture and oxygen and does not clog air conditioning and refrigeration systems.



ST ALBANS HVAC Leak Stop +U/V DYE Kit Detector Leak

1 PC 30ML Syringe for system up to 4 tons or 500ml of compressor lubricant



- 1PC 30ml HVAC Leak Stop +U/V DYE Syringe
- 1PC Luer Adapter
- 1PC 1/4 SEA Adapter for R22 -R134a-R404A-R507C, suitable for CFC,HCFC,HFC(except R410A) (Black O-ring)
- 1PC 5/16 SAE Adapter for R410A(Green O-ring)
- 1PC 1/4 Lock Adapter Connect with Quick Coupler
- 1PC Refrigeration Oil Installation Hose
- 1PC Push Rod
- 1PC Plastic Box



[@chinawalltradingdubai](https://www.instagram.com/chinawalltradingdubai)



[China Wall Trading L.L.C](https://www.facebook.com/chinawalltradingdubai)



www.chinawalluae.com

